

STANDARD HEIGHT TABLE LEG OPTIONS



H I G H L I G H T E S




Adjustable legs with push button



OLEGAC

OLEGA

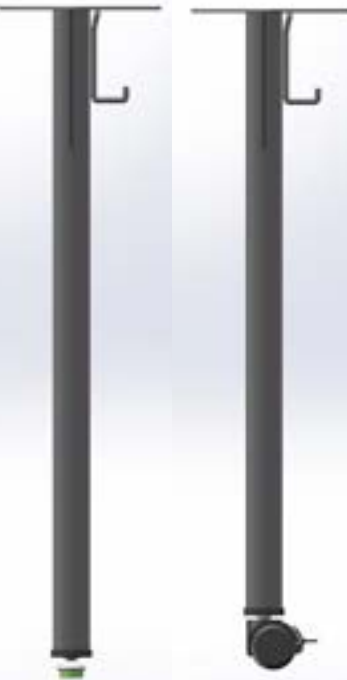

OLEG

OLEGC

- 4 Options
- 14 Gauge High Strength Steel
- 12 Gauge Steel Mounting Plate
- Soft Wheel Caster Options

- 4 Glide Options
- Lifetime Frame Warranty
- Sleek and Durable
- Fits All Our Tables

Interlox Table Leg Specifications

Leg Mounting Plate: 12-gauge steel plate, formed with four mounting holes and tumble deburred.

Leg "V" Support: .875 x 1.562 Elongated oval laser cut, 14-gauge Cold Rolled High Strength Low Alloy Steel.

Leg Tube: .875 x 1.562 Elongated oval laser cut, 14-gauge Cold Rolled High Strength Low Alloy Steel. Minimum 24" of total weld. Unit is chrome plated after all welding is complete. Fixed height unit is available in standard chrome.

Glide System: Glide attachment will be a standard internal gripping spring steel umbrella at least 5/8" diameter or larger. The glide will have a ferrule. Glide casing and ferrule shall be constructed of durable case hardened steel; no plastic. The glide will be of full swivel design, silent and firm fitting for positive attachment and retention. All glides must make full level contact with the floor and the maximum swivel angle of the glide shall not be violated. Incorporating our exclusive glide button system available in either nylon, neoprene, steel, or wool felt bottom, pick the right base for the floor surface. Snap on a new base for surface change or wear replacement.



rating our exclusive glide button system available in either nylon, neoprene, steel, or wool felt bottom. Pick the right base for the floor surface. Snap on a new base for surface change or wear replacement.

Casters: Standard twin-wheel hooded casters.



Legs: Sold separately from table Tops and individually, not as a set. Available in fixed height and adjustable height. Available with our exclusive glide system or with soft casters. Legs are sold individually to allow for customization of each table. These legs are equipped with backpack/


Model Number and Leg Height:

- OLEG • 28.5"
- OLEGC • 28.5"
- OLEGA • 25.75" to 34.75"
- OLEGAC • 25.75" to 34.75"

Here is a list of the Interlox tables and the quantity of legs each requires:

- OARQUE • 3 Legs
- OBANNER • 4 Legs
- OBONE • 3 Legs
- OBONE60 • 6 Legs
- OBOW • 4 Legs
- OCAP • 3 Legs
- OCASK • 4 Legs
- OCINCH • 4 Legs
- OCLLOUD • None - Legs included
- OCURL • 4 Legs
- ODI • 3 Legs
- ODIASML • 3 Legs
- ODIADBL • 4 Legs
- ODOCK • 4 Legs
- OEBS • 4 Legs
- OFIN • 3 Legs
- OFLAG • 4 Legs
- OFLOW • 4 Legs
- OFOG • 4 Legs
- OPROP • 4 Legs
- ORIPPLE • 4 Legs
- OSAIPH • 4 Legs
- OSCAP • 4 Legs
- OPLASH • 4 Legs
- OTDSK • 4 Legs
- OTOOTH • 4 Legs
- OWING • 3 Legs
- ALL STANDARD ACTIVITY TABLE TOPS REQUIRE • 4 Legs

Leg Color Options:



Exclusive Glide System
Choose the glide base you need for your floor surface. When glide needs replacement, snap-lock on a new base.
Nylon, Neoprene, Steel, Wool Felt

