



460/469 APTITUDE HP LIFT-LID STUDENT DESK


Extra deep (5") lift-lid book box desk has extra deep storage. The welded in-box pencil tray is made to be easily accessible and has plenty room. The lift-lid hinge is a full length piano type hinge welded to the book box. Safety bumpers keep operation quiet and fingers safe.



460

PLEASE NOTE:
Desk Orders
Meeting Volume Quantities
ALWAYS Have the Option of
Choosing ANY Standard
Formica Laminate at
NO ADDITIONAL UPCHARGE


Standard
Powdercoated
Frame Colors:

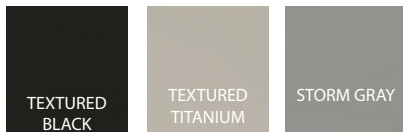

Standard Hard
Plastic Top
Colors:



Optional Hard
Plastic Top
Colors:

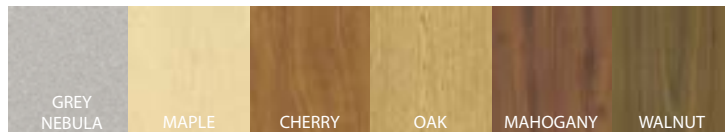

Aptitude™ 460/469 Lift-Lid Student Desk Specifications

Frame: All-tubular design, 1" diameter, 18-gauge front leg running from side to side is multiple arc welded to a integral 1", 18-gauge U-shaped top support and rear leg. 5/8", 18 gauge tubular U-brace is inserted into punched holes in the rear legs and welded to all four legs. Minimum 4-1/2" of total weld. Frame is chrome plated or painted after all welding is complete.

Standard Chrome Finish: Chrome is comprised of metal layers (Nickel & Chromium) electrostatically bonded to metal. Our standard is 4-6 mills (25%-50% more than our competitors) of Nickel. Hard-Chrome will not scratch. CASS test per ASTM B 368 - 22 hours harsh tested before rust. Our product is chromed on plateable quality tubing after all welding is completed.


Book box: Lift-Lid: 22-1/4" x 16" x 5" deep, 20-gauge, one piece, seamless, deep drawn steel box. Embossed shelf and stamped pencil tray. Top attached by full length piano hinge riveted to box and two silent friction hinges which control top. Book box is riveted to frame at five points.

Inserts: 86" diameter, nickel/chrome plated tubing with punched holes to receive adjusting screws. Leg adjustment uses self-tapping lockingscrewswhichpasscompletelythrough both upper leg and lower insert.

Glide System: Glide attachment will be a standard internal gripping spring steel umbrella at least 5/8" diameter or larger. The glide will have a ferrule. Glide casing and ferrule shall be constructed of durable case hardened steel; no plastic. The glide will be of full swivel design, silent and firm fitting for positive attachment and retention. All glides must make full level contact with the floor and the maximum swivel angle of the glide shall not be violated. Incorporating our exclusive glide button system available in either nylon, neoprene, steel, or wool



felt bottom. Pick the right base for the floor surface. Snap on a new base for surface change or wear replacement.



Hard Plastic Top: Solid molded thermoset plastic. 18" x 24" x 5/8" with smooth molded edges and permanent color throughout thickness. Pencil groove. Top is attached using self-tapping screws into seven uniformly drilled holes.

Warranty:

- Limited Lifetime Frame Warranty
- Ten Year Comprehensive Warranty

Models:

- 460 • 23-1/2" - 29-1/2" Adjustable at 1" Increments.
- 469 • 29-1/2" Fixed Heights

