

APTITUDE STUDENT DESK




Models without Baskets:

- 430•23-1/2"-29-1/2" Adjustable at 1" Increments.
- 430SE•18"x24" Laminate Top.
- 439•29-1/2" Fixed Height.
- 439SE•18"x24" Laminate Top.


Models with Baskets:

- 440•23-1/2"-29-1/2" Adjustable at 1" Increments. 18"x24" HP Top.
- 440SE•Laminate top.
- 449•29-1/2" Fixed Height.
- 449SE•Laminate top.



Bumper Mold Edge Available On This Item Upon Request.


Standard Powdercoated Frame Colors:

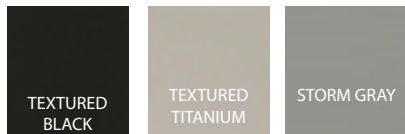

Standard Hard Plastic Top Colors:



Optional Hard Plastic Top Colors:

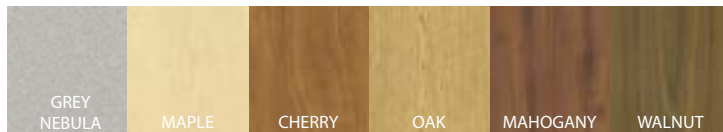

Aptitude™ Student Desk Specifications

Frame: All-tubular design, 1" diameter, 18-gauge front leg running from side to side is multiple arc welded to a integral 1", 18-gauge U-shaped top support and rear leg. 5/8", 18 gauge tubular U-brace is inserted into punched holes in the rear legs and welded to all four legs. Minimum 4-1/2" of total weld. Frame is chrome plated after all welding is complete.

Standard Chrome Finish: Chrome is comprised of metal layers (Nickel & Chromium) electrostatically bonded to metal. Our standard is 4-6 mills (25%-50% more than our competitors) of Nickel. Hard-Chrome will not scratch. CASS test per ASTM B 368 - 22 hours harsh tested before rust. Our product is chromed on plateable quality tubing after all welding is completed.

Bookbasket: 12" x 17" x 5" deep with trimmed and rounded edges. The main structure incorporates four 1/4" C-1008-1010 carbon steel rods, formed as the perimeter of the unit. Six 3/16" C-1008-1010 carbon steel rods are formed 'front to rear' into the storage surface area. The bookbasket is welded to frame at six points before all finishing.

Inserts: 86" diameter, nickel/chrome plated tubing with punched holes to receive adjusting screws. Leg adjustment uses self-tapping locking screws which pass completely through both upper leg and lower insert.

Glide System: Glide attachment will be a standard internal gripping spring steel umbrella at least 5/8" diameter or larger. The glide will have a ferrule. Glide casing and ferrule shall be constructed of durable case hardened steel; no plastic. The glide will be of full swivel design, silent and firm fitting for positive attachment and retention. All glides must make full level contact with the floor and the maximum swivel angle of the glide shall not



be violated. Incorporating our exclusive glide button system available in either nylon, neoprene, steel, or wool felt bottom. Pick the right base for the floor surface. Snap on a new base for surface change or wear replacement.



Top: Solid molded thermoset plastic. 18" x 24" x 5/8" with smooth molded edges and permanent color throughout thickness. Pencil groove. Top is attached using self-tapping screws into seven uniformly drilled holes.

Warranty:

- Limited lifetime frame warranty
- Ten Year Comprehensive

PLEASE NOTE:
Desk Orders Meeting Volume Quantities ALWAYS Have the Option of Choosing ANY Standard Formica or WilsonArt Laminate at NO ADDITIONAL UPCHARGE



STANDARD LAMINATE OPTIONS - SEE PAGE 88.

SPRAY EDGE - STANDARD BLACK OR GRAPHITE.

OPTIONAL SPRAY EDGE COLORS NO UPCHARGE ON SAME COLORS 50 OR MORE - SEE PAGE 88 FOR OPTIONS